

# Implementations for Scattering at 1.8 Volt Between Battery-Less Transponder and Mobile Telephones

Roman Willi<sup>ID</sup>, Lars Kamm, Paul Zbinden<sup>ID</sup>, *Member, IEEE*, and Matthias Schütz<sup>ID</sup>, *Member, IEEE*

**Abstract**—This work concerns advanced implementations of a battery-less transponder operated by intentionally generated wireless signals in the 2.4 GHz ISM band. The wireless signals consist of a power supplying data stream and of a quasi-continuous Bluetooth RF (radio frequency) signal, which enables the transponder to back-scatter the RF signal to a receiver. Our setup uses two regular, unmodified mobile telephones, one for transmitting the signals, the other for receiving the scattered signals. The transponder modulates the quasi-continuous RF signal according to a subcarrier and a predetermined 1 Mbit/s bit-stream. The present extended study further compares advanced implementation techniques: Micro Controller Unit (MCU), FPGA (Field Programmable Gate Array), CPLD (Complex Programmable Logic Device) and ASIC (Application Specific Integrated Circuit) and implements a CPLD test version. Experimental results suggest that our CPLD is more suitable than MCU or FPGA implementations. The paper further demonstrates the transition from a fully synchronous to a low-power asynchronous CPLD implementation. The measured power consumption for generating the bit-stream is 87  $\mu$ W, which results in a 6-fold reduction compared to our previous work. Accordingly, the asynchronous CPLD implementation increases total efficiency by 40 % and it is expected that this will significantly extend the wireless operational range of the battery-less transponder. Thus, the CPLD technology enables fast, flexible, and cost-effective implementation, particularly in the field of research and development.

**Index Terms**—Back-scattering, battery-less, harvesting, mobile telephone, subcarrier, MCU, DMA, FPGA, CPLD, ASIC.

## I. INTRODUCTION

**B**ATTERY-LESS transponders become increasingly important as IoT (Internet of things) devices strongly gain more attention, particularly if considered under the aspect of maintenance-free operation. One application is known from RFID (Radio-frequency Identification), which is commonly used to establish inventories of goods equipped with RFID tags. The tag information is retrievable by using an RFID reader that transmits RF (radio frequency) signals to the tag, which returns the tag information by reflecting and modulating the incident RF signal. In effect, this back-scattering

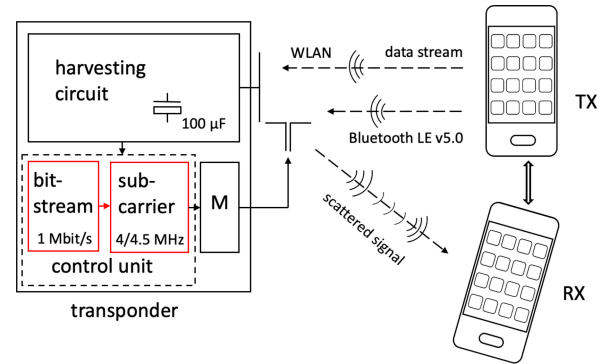


Fig. 1. Overview showing transmitter TX, receiver RX and transponder with harvesting circuit and separated bit-stream generator and subcarrier generator.

technology delegates the power demanding wireless carrier signal generation from the battery-less transponder to the powerful RFID reader. However, these type of RFID readers are complex and of limited usability. On the other hand, mobile telephones are everyone's constant accompany, but are unsuitable for tag readings over more than very short distances (e.g., NFC) since the emitted RF power is typically too weak. Nevertheless, it is possible to increase the available energy at the transponder by combining RF scattering with accumulating RF energy over time (RF harvesting). For example, [1] and [2] suggest RF harvesting but require a continuous wave (CW) signal for the back-scattering such that the scattered signal is detectable by the telephone's Bluetooth Low Energy (BLE) receiver. However, a CW signal source is neither generally available nor ubiquitously usable. Therefore, our experiments focus on conventional, unmodified mobile telephones based on regular hardware and commonly programmed software: one for emitting a strong harvesting signal and a quasi-continuous signal, the other for receiving the back-scattered signals. The achievable wireless operational range is limited to a few centimeters, which motivates the present study, an extended version of [3], to evaluate possibilities of further expanding these limitations.

## II. BACKGROUND

Corresponding to our preceding work [3], Fig. 1 and Fig. 2 show the basic setup that comprises transmitting telephone TX, receiving telephone RX and a transponder with RF harvesting circuit HV (e-peas AEM30940), control unit CU and modulator M. The signal for RF harvesting consists of a continuously generated data stream transmitted via WLAN (Wireless Local Area Network, IEEE 802.11-2012). On the

Manuscript received 29 December 2023; revised 7 March 2024; 8 May 2024; and 28 June 2024; accepted 5 July 2024. Date of publication 15 July 2024; date of current version 29 July 2024. This work was supported by the Innosuisse, Swiss Innovation Agency, Bern, Switzerland. (Corresponding author: Matthias Schütz.)

Roman Willi, Lars Kamm, and Paul Zbinden are with the Institute for Microelectronics and Embedded Systems, OST Eastern Switzerland University of Applied Sciences, 9000 St. Gallen, Switzerland (e-mail: roman.willi@ost.ch; lars.kamm@ost.ch; paul.zbinden@ost.ch).

Matthias Schütz is with idp invent ag, 4600 Olten, Switzerland (e-mail: office@idpinvent.ch).

Digital Object Identifier 10.1109/JRFID.2024.3428359

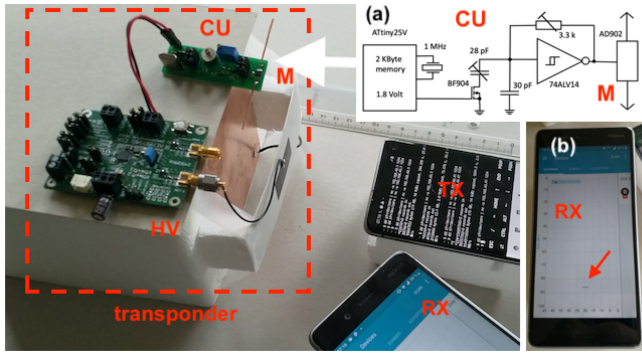


Fig. 2. Setup with mobile telephones TX, RX and transponder with harvesting HV and scattering SC units, schematics (a) and captured BLE message (b).

other hand, BLE Standard 5.0 enables extended advertising messages of 255 Bytes and periodic re-transmissions by using secondary advertising channels within the ISM band in a random-like manner. With our specifically designed messages (App on Android version 9 with Application Programming Interface API 28) we are able to produce sporadic advertising messages that appear as continuous wave signals during 2 ms at approx. 2475.75 MHz. These quasi-continuous wave signals enable the scattering with a 4 and 4.5 MHz frequency translation resulting in scattered signals at  $2480 \pm 0.25$  MHz (BLE channel 39). The transponder of Fig. 2 operates at 1.8 V and comprises a MCU (Micro Controller Unit) with external crystal for generating a bit-stream (1 Mbit/s) and an analog RC-oscillator for generating a subcarrier signal that provides the 4/4.5 MHz frequency translation in dependency of the bits to be transmitted (series of 200 bit BLE4.2 messages + 56 bit pause) until the harvested energy that corresponds to the discharge voltage difference is consumed ( $C \cdot \Delta V^2 / 2$ ). The resulting, experimental and non-standard 78 % duty cycle economizes startup procedures and speeds up BLE-message detection. The oscillator capacitance is switchable (MOSFET) for continuous-phase shifting the subcarrier frequency between 4/4.5 MHz in dependency of the message bits (e.g., tag ID) to be transmitted. Fig. 2b shows the event of a successfully captured BLE message at the receiving mobile telephone (red arrow). This setup reduced active power consumption from 9 to 1.12 mW and extended the wireless operational range from 2 to  $\approx 4$  cm. The efficiency improvement extended the period of effective back-scattering during the harvesting cycles, which increased the detection probability and thus the wireless operational range. Therefore, we expect that advanced implementations will further improve power efficiency and range.

### III. TECHNOLOGIES

All our bit-stream generator implementations use an external Temperature-Compensated crystal Oscillator (TCXO e.g., SIT1576, 5 ppm,  $16 \mu\text{A}$  @ 1 MHz or  $40 \mu\text{A}$  @ 2 MHz). Internal device oscillators are power-efficient but often lack the 50 ppm accuracy required by the BLE Standard. In contrast to our previously used analog RC oscillator (e.g.,  $322 \mu\text{A}$  @ 4/4.5 MHz), the subcarrier may be generated by an internal

oscillator (e.g., ASIC) or by digitally dividing a 36 MHz clock signal by 8 or 9 (e.g., FPGA).

#### A. MCU

The MCU (STM32L0, 32 bit ARM Cortex-M0+) with external 2 MHz TCXO uses DMA (Direct Memory Access) and SPI (Serial Peripheral Interface), which allows to transfer the constant bit-stream data directly from flash memory to the SPI peripherals and to put the CPU (Central Processing Unit) into deep sleep mode after setting up the start configuration (Boot Code). This results in a power consumption of  $270 \mu\text{W}$  for bit-stream generation, which is 50 % less than our preceding setup [3]. The Von Neumann architecture of the ARM Cortex-M0 prevents a lower system frequency of 1 MHz. This disadvantage could be eliminated with an ARM Cortex-M4 core (Harvard architecture), so that the power consumption can be reduced even further.

#### B. FPGA

Our FPGA (Field Programmable Gate Array) considerations involve bit-stream as well as subcarrier generation by two low power FPGAs: Microchip IGLOO (130 nm technology) and Lattice iCE40. Both FPGAs require an external oscillator (e.g., 2 MHz TCXO) and apply internal frequency multiplication (PLL) to 36 MHz and clock division by 8 or 9. Basic calculations show that IGLOO consumes  $\approx 1.75$  mW, whereas the iCE40 requires  $\approx 3.4$  mW, which is mainly related to the power hungry PLL multiplication and the divisions for subcarrier generation. Thus, these all integrating configurations seem less suitable for our application. An experimental IGLOO setup for the bitstream generation alone @  $V_{\text{bank}} = 1.8$  V and  $V_{\text{core}} = 1.2$  V is obtainable from harvesting circuit), shows a consumption of  $720 \mu\text{W}$  for a shift register implementation of 256 cells (includes 56 bits for pause) and  $580 \mu\text{W}$  for a ROM lookup version for 256 bit. Consequently, a power consumption of  $652 \mu\text{W}$  (inkl.  $72 \mu\text{W}$  for external oscillator) is feasible, which however is clearly less efficient than the MCU solution.

#### C. CPLD

CPLDs (Complex Programmable Logic Device) are re-configurable digital circuits comprising functional cells that need programming to implement the desired function. This programming changes the physical connections within and between the functional cells and external connectors. Our CPLD implementation, a Lattice ispMACH LC4032ZE (180 nm technology), and its optimization is described in Section IV.

#### D. ASIC

ASIC (Application-Specific Integrated Circuit) technology offers highly efficient and optimized solutions but with limited redesign flexibility and expensive prototype development. As illustrated in Fig. 3(a), our simulation uses a circuit in xh018 (180 nm) technology from XFAB at 1.8 V. The circuit comprises a Power On Reset (POR) circuit, a stop down

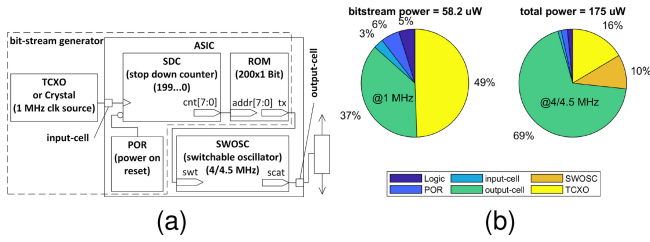


Fig. 3. ASIC: overview (a), distribution of energy experiment D1 (b).

counter (*SDC*), Read Only Memory (*ROM*) and a switchable oscillator (*SWOSC*). The 1 MHz clock signal may be supplied by two variants: experiment D1 from an external *TCXO* (e.g., SIT1576, which requires  $16\mu\text{A}$  and the ASIC input-cell  $0.96\mu\text{A}$ ) or experiment D2 from an ASIC-driven external crystal, requiring  $95\mu\text{A}$ , including ASIC input-cell (data sheet of Intellectual Property (IP) Block). The Post Place&Route analog transient simulation shows that the fully synchronized logic consumes  $1.58\mu\text{A}$  (@1 MHz system clock), of which  $0.78\mu\text{A}$  (55 %) is for the clock tree and  $1.13\text{nA}$  for the static current. In addition, we assume that the *POR* circuit requires  $1.8\mu\text{A}$  (data sheet of IP-Block), the 4/4.5 MHz *SWOSC* requires  $10\mu\text{A}$  (as demonstrated in [4]) and the ASIC output-cell requires  $67\mu\text{A}$  (@4/4.5 MHz with 2 pF parasitic load capacitance). Thus, our simulation and the external references indicate that a total power consumption of 175  $\mu\text{W}$  is feasible (experiment D1). Alternatively, the design variant with an external crystal requires 316  $\mu\text{W}$  (experiment D2). Particularly the result of our experiment D1 corresponds to the 205  $\mu\text{W}$  power requirement of [2], which however operates at 50 MHz system clock. An asynchronous implementation as presented in Section IV-1 (i.e., excluding the clock tree) may reduce power consumption of the logic even further.

#### IV. CPLD IMPLEMENTATION

Fig. 4(a) shows a CPLD implementation for bit-stream generation with external *TCXO*, *POR* and *SWOSC* for subcarrier generation. Fig. 4(b) shows the corresponding test setup for power consumption measurements. The CPLD operates at 1.8 V (core and bank) and upon reset, an 8 bit *SDC* decrements from  $199_{\text{dec}}$  to 0 and stops at 0. The count value *cnt* corresponds to an address *addr* of a  $200 \times 1$  bit *ROM* for providing the predetermined bit-stream at the *tx* output.

1) *From Fully Synchronized to Optimized CPLD Implementation*: Total power consumption is determined by inrush, start-up, static, and dynamic power [5]. Inrush power is given by the CPLD and its blocking capacitors. Start-up power, caused by loading the configuration, is also technology dependent. The smallest CPLD in the ispMACH series was chosen to keep the static power as low as possible. Dynamic power dissipation is generally represented by the approximation  $P_{\text{dyn}} = \alpha C_l V_{\text{dd}}^2 f_{\text{clk}}$ , where  $\alpha$  is the switching activity factor (also called transition probability),  $C_l$  is the overall capacitance to be charged and discharged in a reference clock cycle,  $V_{\text{dd}}$  is the supply voltage, and  $f_{\text{clk}}$  is the clock frequency [6]. The supply voltage is given by the core voltage of this technology. The frequency at which the *tx* signal

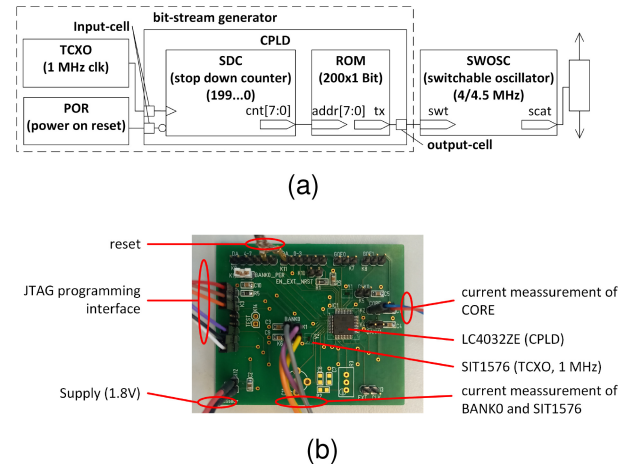


Fig. 4. Overview of CPLD implementation (a) and PCB of CPLD measurement setup (b).

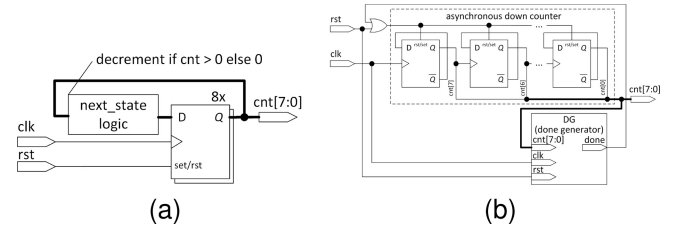


Fig. 5. Stop down counter (*SDC*): synchron (a) and asynchron (b).

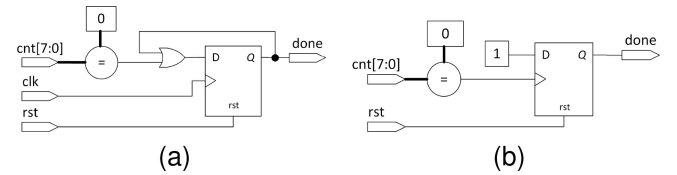


Fig. 6. Done generator (*DG*): synchron (a) and asynchron (b).

needs to be updated (1 MHz) is also given. In order to reduce power consumption, only the number of active gates  $\alpha$  can be reduced. The coming chapters will show how to move from a fully synchronous CPLD implementation (high  $\alpha$ ) to a low-power asynchronous variant (low  $\alpha$ ).

2) *Stop Down Counter*: The counters in Fig. 5 count from  $199_{\text{dec}}$  down to 0. Once the counters reach the value 0, the *done* signal goes HIGH, and the counter stops.

Fig. 5(a) shows a synchronous stop down counter. All flip-flops update their state simultaneously at every positive clock edge. In contrast, an asynchronous counter (Fig. 5(b)) works without a central clock signal. Each flip-flop changes its state based on the state of the previous flip-flop, which reduces the toggle activity. As also described in [7], this enables a current reduction of 1.9 %, as the flip-flops only perform a storage process when required.

3) *Done Generator*: Fig. 6 shows the done generator (*DG*), which is instantiated in Fig. 5(b). The circuit set the output *done* = HIGH if the input *cnt* reaches 0.

As Fig. 6(a) shows, the *done* signal can be stored synchronously on each clock edge. However, in order to achieve a current reduction of 4.2 %, asynchronous storage as shown in

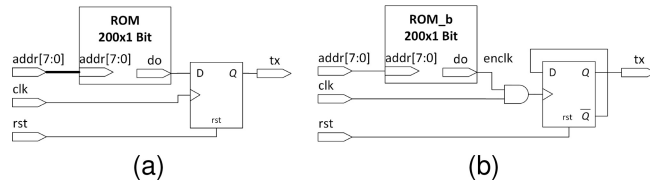


Fig. 7. Circuits of synchronized output signal  $tx$ : without clock enable (a) and clock enabled toggle flip-flop (b).

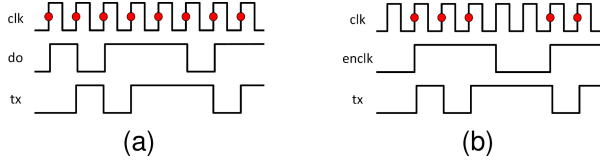


Fig. 8. Synchronized output signal  $tx$ : without clock enable (a) and clock enabled toggle flip-flop (b).

Fig. 6(b) may be used. In this way, the flip-flop is only active when the signal  $cnt$  reaches 0 for the first time.

4) *Synchronized Output Signal*: As described in [8], the synthesis process of the ROM from Fig. 4(a) creates logical paths that have different propagation delays. When a signal is routed through paths with different delays, undesirable short conditions occur at the output, called hazards. The eight asynchronous output signals  $cnt[7:0]$  of the SDC of Fig. 5(b) also promote the occurrence of hazards because they do not change at the same time. Hazards cause undesirable power consumption because the state changes are unnecessary. The power consumption increases additionally when the hazardous signal  $tx$ , as seen in Fig. 4(a), is led out of the CPLD. This CPLD external line has parasitic capacitances that are unnecessarily reloaded with the output driver. As described in Fig. 7(a) the signal can be synchronized with the clock by interposing a flip-flop. This enables a current reduction by 27.8 %, since the hazards on the signal  $do$  no longer reach the output  $tx$  of the CPLD.

5) *Toggle Flip-Flop With Clock Gating*: As shown in Fig. 8(a), the signal  $do$  is saved to the output  $tx$  with every positive clock edge. The flip-flop requires power for the storage process on every clock edge (dots in Fig. 8(a)), although the output  $tx$  does not change in every case.

A circuit is now presented in Fig. 7(b) that only requires power for the storage process when it is necessary. A toggle flip-flop forms the memory element that produces the output  $tx$ . The  $ROM_b$  stores when the toggle flip-flop should switch. Using clock enable  $enclk$  and the AND gate, the clock signal  $clk$  is activated at the right time. Fig. 8(b) illustrates when the toggle flip-flop has to switch. The circuit enables a current reduction of 31.1 %, as far fewer storage operations are now carried out. To convert the data  $D_{ROM}$  of the ROM from Fig. 7(a) into the data  $D_{ROM_b}$  of the  $ROM_b$  from Fig. 7(b), use the following algorithm:  $D_{ROM_b} = (D_{ROM} >> 1) \oplus D_{ROM}$ .

6) *Summary*: The starting point is the fully synchronous design with a power consumption of  $76.3 \mu W$ . Table I shows the savings in power consumption when implementing the

TABLE I  
DEVELOPMENT STEPS

| description of development step of the CPLD implementation | total power consumption*<br>[ $\mu W$ ] | savings     |      |
|------------------------------------------------------------|-----------------------------------------|-------------|------|
|                                                            |                                         | [ $\mu W$ ] | [%]  |
| fully synchronized implementation                          | 76.3                                    | -           | -    |
| chapter IV-2:<br>asynchron stop down counter               | 74.9                                    | 1.44        | 1.9  |
| chapter IV-3:<br>asynchron done generator                  | 73.1                                    | 3.24        | 4.2  |
| chapter IV-4:<br>synchronized output signal                | 55.1                                    | 21.2        | 27.8 |
| chapter IV-5:<br>toggle flip-flop at output signal         | 52.6                                    | 23.8        | 31.1 |

\* total dynamic and static power consumption, averaged over 5 seconds during continuous data transmission

modifications proposed in Sections IV-2 to IV-5. The optimized design achieves a measured power consumption of  $52.6 \mu W$ , with a static power consumption of  $29.2 \mu W$ , representing 55 % of the total. Thus, these optimizations show remarkable efficiency gains and we assume that similar optimizations applied to ASICs will achieve comparable improvements.

## V. RESULTS

Table II summarizes the results of measurements (meas.) and simulations (simul.) for bit-stream generation (i.e., without SWOSC) to enable a fair comparison of the technologies. The MCU solution achieves a factor of 2 over our previous solution but seems less suitable for our application, presumably due to high complexity of MCU even when the CPU enters sleep mode after DMA setup. Also FPGA implementations with a general purpose architecture are unlikely to reduce power requirement. The CPLD test setup achieves a power consumption of  $87 \mu W$ , which is 68 % less than MCU measurements.

In our test setup as shown in Fig. 1, the WLAN transmitting power of the mobile telephone TX is limited to 20 dBm (Standard IEEE 802.11b). An external WLAN scanner (WiFiAnalyser) indicated a predominate wireless power intensity of  $-32$  dBm, which results from the continuous WLAN data stream at 2427 to 2447 MHz (WLAN Channel 6). This intensity and the  $100 \mu F$  storage capacitor enabled energy accumulation intervals of 5 to 7 seconds and subsequent power supplying bursts with a stable voltage of 1.8 Volt during  $\approx 50$  ms. Measurements of the PCB implementation and an external crystal oscillator (ECS-2520MVL,  $260 \mu W$ ) achieved a wireless operational range of 5 cm, which is still within the near-field range of the 2.4 GHz band. We expect that further harvesting and signal processing improvements will extend this to the mid-field range.

Transient analog ASIC simulations show a 33 % advantage over CPLD alternatives in generating the bit-stream (excl. switchable oscillator SWOSC, incl. output-cell @1 MHz). It is expected that a ASIC implementation similar to [2], i.e., a design with combined bit-stream generator and 4/4.5 MHz switchable oscillator, will reduce overall power consumption. Furthermore, we assume that optimization steps, similar to the CPLD optimizations as shown above, enable additional efficiency improvements.

TABLE II  
COMPARISON OF BITSTREAM GENERATION

| experiment                  | A           | B           | C           | D1          | D2          |
|-----------------------------|-------------|-------------|-------------|-------------|-------------|
| technology, component       | MCU STM32L0 | FPGA AGL030 | CPLD LC4032 | ASIC 180 nm | ASIC 180 nm |
| clock source freq. [MHz]    | TXCO 2      | TXCO 2      | TXCO 1      | TXCO 1      | Crystal 1   |
| evaluating                  | meas.       | meas.       | meas.       | simul.      | simul.      |
| bit-stream Power [ $\mu$ W] | 270         | 652         | 87          | 58          | 199         |

TABLE III  
COMPARISON OF RESULTS

| reference                             | [1]                | [2]                    | [3]                        | this work                  |
|---------------------------------------|--------------------|------------------------|----------------------------|----------------------------|
| technology, component                 | MCU MSP430F21      | ASIC 65 nm             | MCU ATtiny25V              | CPLD LC4032                |
| power supply                          | battery 2.5 V      | external 3.5 V         | RF harvest 1.8 V           | RF harvest ready 1.8 V     |
| system clock freq. [MHz]              | 1                  | 50                     | 1                          | 1                          |
| bit-stream* power [ $\mu$ W]          | n/a                | $\approx 148$          | 540                        | 87                         |
| subcarrier generator power [ $\mu$ W] | LC osc. 12 MHz n/a | freq. div. 4/5 MHz n/a | ext. RC osc. 4/4.5 MHz 580 | ext. RC osc. 4/4.5 MHz 580 |
| total active power [ $\mu$ W]         | 1560               | 205                    | 1120                       | 667                        |

\* static + dynamic power of logic, power on reset and system oscillator

## VI. CITING PREVIOUS WORK

As shown in Table III, the transponder of [1] uses battery power resulting in above-mentioned maintenance problems. Reference [2] presents an ASIC chip in 65 nm CMOS with an attractive active power consumption of 205  $\mu$ W, however this solution is inherently inflexible, expensive and time consuming and therefore less suitable in a research and development environment. Our preceding work [3] is based on unstable and power demanding discrete components, which motivates further implementation development.

## VII. CONCLUSION

MCU and FPGA solutions appear to be less suitable for our low power application because of their relative high power consumption of 270  $\mu$ W and 652  $\mu$ W, respectively. In contrast thereto, the presently tested CPLD implementation consumes 87  $\mu$ W for bit-stream generation, which corresponds to a factor of 6 reduced power consumption compared to our preceding MCU setup requiring 540  $\mu$ W [3]. This corresponds to a total efficiency improvement of 40%. On the other hand, our ASIC simulations together with assumptions concerning subcarrier generation (e.g., 4/4.5 MHz oscillator) suggest that a total power consumption of 175  $\mu$ W is feasible, which basically confirms the 205  $\mu$ W as demonstrated by [2]. In the present application, the achievable wireless operational range mainly depends on the power harvesting capability and the acceptable waiting time. Nevertheless, optimizations of power consumption significantly relax these constraints, as shown by the CPLD implementation and the measured range improvement from 4 to  $\approx 5$  cm. Thus, the results of

this feasibility study and the measurements point towards promising advancements but also indicate principal limitations.

## ACKNOWLEDGMENT

The authors thank Innosuisse, Bern, Switzerland and the Institute for Microelectronics and Embedded Systems (IMES) at the Eastern Switzerland University of Applied Sciences, Rapperswil, Switzerland, for the support of their work on this article.

## REFERENCES

- [1] J. Ensworth and M. Reynolds, "BLE-backscatter: Ultralow-power IoT nodes compatible with bluetooth 4.0 low energy (BLE) smartphones and tablets," *IEEE Trans. Microw. Theory Tech.*, vol. 65, no. 9, pp. 3360–3368, Sep. 2017.
- [2] J. D. Rosenthal, A. Mandal, V. Sathe, and M. S. Reynolds, "An all-digital 1 Mbps, 57 pJ/bit bluetooth low energy (BLE) backscatter ASIC in 65 nm CMOS," in *Proc. IEEE Int. Conf. RFID*, Las Vegas, NV, USA, 2022, pp. 109–113.
- [3] M. Schütz, "Harvesting for scattering at 1.8 volt between battery-less transponder and mobile telephones," in *Proc. IEEE 13th Int. Conf. RFID Technol. Appl.*, 2023, pp. 225–228.
- [4] Y. Tokunaga, S. Sakiyama, A. Matsumoto, and S. Dosho, "An on-chip CMOS relaxation oscillator with power averaging feedback using a reference proportional to supply voltage," in *IEEE Int. Solid-State Circuits Conf. Tech. Dig.*, 2009, pp. 404–405.
- [5] A. Bellaouar, M. I. Elmasry, *Low-Power Digital VLSI Design: Circuits and Systems*. Boston, MA, USA: Wolters Kluwer, 1999.
- [6] R. Mehrotra, E. Popovici, K. L. Man, and M. Schellekens, "Power reduction and technology mapping of digital circuits using AND-inverter graphs," in *Proc. 27th Int. Conf. Microelectron.*, 2010, pp. 295–298.
- [7] J.-S. Kim, J.-O. Yoon, and B.-D. Choi, "Low-power counter for column-parallel CMOS image sensors," in *Proc. IEEE Asia Pac. Conf. Circuits Syst. (APCCAS)*, 2016, pp. 554–556.
- [8] V. D. Agrawal, "Low-power design by hazard filtering," in *Proc. 10th Int. Conf. VLSI Design*, 1997, pp. 193–197.



**Roman Willi** received the diploma degree in electrical engineering from the University of Applied Sciences Rapperswil, Switzerland, in 2005. He is a Long-Term Scientific Employee in the field of digital and analogue ASIC circuit design with the Institute for Microelectronics, Embedded Systems and Sensors, OST Eastern Switzerland University of Applied Sciences, Switzerland.



**Lars Kamm** received the diploma degree in electrical engineering from the University of Applied Sciences Rapperswil, Switzerland, in 2005. He was a Long-Term Scientific Employee in the field of integrated analogue circuit design with the Institute for Microelectronics, Embedded Systems and Sensors. He established the Senior Developer with the start-up company Econovis Engineering AG, Switzerland. He is currently a Lecturer in computer engineering with the OST Eastern Switzerland University of Applied Sciences, Switzerland.



**Paul Zbinden** (Member, IEEE) received the diploma degree in electrical engineering and the Doctor of Technical Sciences degree from ETH Zürich, Switzerland, in 1987 and 1993, respectively.

He began his career with ETH Zürich's Signal and Information Processing Laboratory in 1987 as a Teaching Assistant, progressing to a Research Assistant and the Junior Lecturer in signal processing. Following his Ph.D., he spent a year as a Postdoctor with Prof. G. S. Moschytz. In 1993, he joined Ascom Audiosys, later Bernafon, where he

established an IC development team and pioneered their first digital hearing aid chip. From 2004 to 2010, he worked at Phonak AG, Stäfa, overseeing a joint venture with Cochlear Ltd to develop middle ear implants. In 2010, he joined the Institute for Microelectronics, Embedded Systems and Sensors, Eastern Switzerland University of Applied Sciences, becoming its head in 2011. His current research focuses on hardware acceleration and time-to-digital converters.



**Matthias Schütz** received the diploma degree in physics from the Swiss Federal Institute of Technology, ETH Zürich, Zürich, Switzerland, in 1989, the Postgraduate degree in information-technology and the Master of Advanced degrees in intellectual property, ETH Zürich in 1999 and 2006, respectively

He is the Co-Founder and the Development Engineer of idp invent ag, Olten, Switzerland. His current research interests concern wireless power transfer, RF harvesting, and communication technologies.